



## **GR712RC memory production test coverage and usage constraints**

---

Technical note

2022-03-18

Doc. No GR712RC-TN-0002

Issue 1.0

## CHANGE RECORD

Issue	Date	Section / Page	Description
1.0	2022-03-18	All	First issue of this document

## Table of Contents

1	Introduction	3
1.1	Scope of the document	3
1.2	Parts screened with incomplete test coverage of memory macrocells	3
1.3	Probability that a delivered part has a memory defect	4
1.4	Testing for memory defects in parts already integrated into boards	4
1.5	Distribution	4
1.6	Contact	4
1.7	Reference documents	5
1.8	Abbreviations	5
2	Executive summary	6
3	Inventory of GR712RC memory macrocells	7
4	FTAHBRAM burst-write errors	9
5	Coverage of production test program revision 3	9
5.1	Statistics on number of parts with defects	10
5.2	Memory test coverage of production test program revision 3	10
5.3	Extrapolated probabilities of defects evading screening	12
6	Impact of a defect in a CPU memory on software	13
6.1	Correctable error counters	15
6.2	Radiation effects	16
7	Software package for board-level memory tests	17
7.1	Memory test methodology	18
7.2	Example output	19

## 1 INTRODUCTION

### 1.1 Scope of the document

The GR712RC is a microprocessor implementing two independent CPUs on one silicon die, i.e. CPU0 and CPU1. For each CPU, the silicon implementation utilizes memory macrocells to implement various functions like the register file, and the cache memories. Memory macrocells are also used for implementing the FTAHBRAM (On-chip Memory with EDAC Protection) on the silicon, as well as the instruction trace buffers and the AHB trace buffer. The trace buffers are used for debug purposes only. For the remainder of this document, the memory macrocells on the silicon will also be referred to as simply *memories*.

During the production of digital parts, specific production tests are deployed to verify the functionality of such memory macrocells and to screen out any defective parts as part of the overall production test program. The production tests specific for the memory macrocells of the GR712RC part are implemented by executing software on the two CPUs since Built-In-Self-Test (BIST) has not been implemented for the GR712RC.

In the beginning of 2022, it was discovered that revision 3 of the GR712RC production test program did not offer full coverage of all storage bits in the memory macrocells. Consequently, the production test program was updated by adding additional subtests related to the memory macrocells resulting in revision 5 of the production test program. This Technical Note covers three partially separate issues discovered during the update process:

1. CPU1 coverage issue: One of the subtests of revision 3 of the production test program was only executed on CPU0, hence the test coverage of the memory macrocells specific to CPU1 was incomplete.
2. CPU0 coverage issue: Although revision 3 of the production test program tested all word locations and storage bits in the memory macrocells specific to CPU0, not all storage bits were tested in both logical states.
3. FTAHBRAM burst write issue: Data errors can be induced into the FTAHBRAM during burst writes at low supply voltage.

This Technical Note details the precise test coverage of the memory macrocells in production test program revision 3; the observed and extrapolated probabilities for GR712RC parts with defects to have evaded screening; the consequences for software running on a GR712RC part with defects in the memory macrocells; a description of the FTAHBRAM burst write issue; and a software-based method for testing for CPU0 and CPU1 related defects in parts already integrated into boards.

### 1.2 Parts screened with incomplete test coverage of memory macrocells

The CPU1 and CPU0 test coverage issues apply to GR712RC parts screened with revision 3 and earlier of the production test program. In particular, all delivered GR712RC parts with date codes before D2144 were screened with revision 3 of the production test program. Parts screened with revision 5 and later of the production test program have full test coverage of all memory macrocells.

Note 1: The FTAHBRAM burst write issue applies to all GR712RC parts regardless of date code and what revision of the production test program it was screened with.

Note 2: The following products have complete coverage of memory macrocells:

- GR740 – uses BIST for memory testing
- GR716 – uses BIST for memory testing
- GR718B – does not use memory macrocells

### **1.3 Probability that a delivered part has a memory defect**

Parts tested with revision 5 of the production test program are guaranteed to be fully tested for defects in memories. Parts screened with revision 3 of the production test program may have defects not detected by the screening. Estimated probabilities are given below.

CPU1: After revision 5 of the production test program was introduced, 1.2% of tested parts have been observed to have defects in CPU1 memories that would not have been discovered in revision 3 of the production test program.

CPU0: No parts tested with revision 5 of the production test program have been found to have defects in CPU0 memories that would not have been discovered using revision 3 of the production test program. The probability that a given part screened with revision 3 of the production test program has a defect in a CPU0 memory that could cause data corruption or a software crash has been extrapolated to be less than 0.004%. Existence of such a defect is expected to be discovered immediately when running non-trivial software on the part.

FTAHBRAM burst write: Neither revision 3 nor revision 5 of the production test program includes any screening of the FTAHBRAM burst write issue. Errors may be induced during burst writes to the FTAHBRAM in any GR712RC parts. The exact characteristics vary from part to part. Refer to the errata list in the GR712RC user's manual [RD2] for workarounds.

### **1.4 Testing for memory defects in parts already integrated into boards**

For customers with GR712RC parts tested with revision 3 of the production test program already integrated into boards, the software package “gr712rc-tn0002-sw” is provided. The software package contains source code and a prebuilt binary for board-level tests of all CPU0 and CPU1 memories. See section 7 for details.

Software is not provided to test for the FTAHBRAM burst write issue.

### **1.5 Distribution**

Contact Cobham Gaisler for inquiries about redistribution of this Technical Note.

### **1.6 Contact**

For questions on this document, please contact Cobham Gaisler support at [support@gaisler.com](mailto:support@gaisler.com).

## 1.7 Reference documents

- [RD1] “Radiation characterization of a dual core LEON3-FT processor”, F. Stuesson, J. Gaisler, R. Ginosar, T. Liran, 2011, 12<sup>th</sup> European Conference on Radiation and Its Effects on Components and Systems, DOI: [10.1109/RADECS.2011.6131334](https://doi.org/10.1109/RADECS.2011.6131334)
- [RD2] “GR712RC – Dual-Core LEON3FT SPARC V8 Processor – User’s manual”, Cobham Gaisler, GR712RC-UM, Available at <https://www.gaisler.com/gr712rc>
- [RD3] “Handling of External Memory EDAC Errors in LEON/GRLIB Systems”, Cobham Gaisler, GRLIB-AN-0004, Available at <https://www.gaisler.com/notes>
- [RD4] “GR712RC – Dual-Core LEON3-FT SPARC V8 Processor – Data Sheet”, Cobham Gaisler, GR712RC-DS. Available at <https://www.gaisler.com/gr712rc>

## 1.8 Abbreviations

BIST	Built-In Self-Test
CPU	Central Processing Unit
ECC	Error Correcting Code
EDAC	Error Detection and Correction
FPU	Floating Point Unit
GEO	Geostationary Earth Orbit
IU	Integer Unit
MMU	Memory Management Unit
RTL	Register Transfer Level
SEU	Single-Event Upset
SMP	Symmetric Multi-Processing
TLB	Translation Look-aside Buffer

## 2 EXECUTIVE SUMMARY

All GR712RC parts are tested at several stages of the production to screen out parts with defects. However, it has been discovered that revision 3 of the GR712RC production test program had incomplete coverage of some of the memory macrocells. In response, the production test program was updated and revalidated. Revision 5 of the production test program has full coverage of all the CPU memories. However, parts that passed revision 3 of the production test program may contain defects in the partially tested CPU memories.

While revising and revalidating the production test program, three issues were identified in revision 3 of the production test program:

1. **CPU1 coverage issue**
  - a. The CPU1 caches and IU register file are **not** tested with full word and bit coverage.
  - b. **77%** of all data words and **81%** of all **bit-states** are **not** tested. See section 5.2 for the definition of “bit-states” and additional information.
  - c. Untested bits exist in all CPU1 memories, but most are located in the D-cache.
2. **CPU0 coverage issue**
  - a. The CPU0 caches and IU register file are tested with **full coverage** of addresses and bits.
  - b. However, **4%** of all **bit-states** are not tested.
  - c. The partially tested bits are located in the cache tag memories (instruction, data, snoop), and in the IU register file.
3. **FTAHBRAM write bursts**
  - a. The 192 KiB FTAHBRAM is tested with **full coverage** of addresses and bit-states using **single word writes**.
  - b. However, data errors may be induced during **burst writes** to the FTAHBRAM.
  - c. The rate of errors increases with decreasing supply voltage and there is a large part to part variation. See section 4.
  - d. Single word writes to the FTAHBRAM do not induce errors. Refer to the errata list in the GR712RC user’s manual [RD2] for workarounds.

After the introduction of revision 5 of the production test program, 1.2% of tested parts have been found to have defects in CPU1 memories that would not have been discovered in revision 3 of the production test program.

No parts tested with revision 5 of the production test program have been found to have defects in CPU0 memories that would not have been discovered in revision 3 of the production test program. The probability of occurrence is estimated in section 5.3.

The consequences for software encountering a defect varies depending on the type and location of the defect. For example, a single stuck bit in the IU register file would result in the CPU becoming unresponsive due to an infinite error-correction loop. In contrast, a single stuck bit in a cache memory appears to software as a cache miss, and software execution continues without error. See section 6 for further failure mechanisms and section 5.3 for estimated probabilities of defects in each memory type.

Parts already integrated into boards can be tested for occurrence of defects in CPU0 and CPU1 memories with a software package provided by Cobham Gaisler (see section 7). Software is not provided to test for the FTAHBRAM burst write issue.

### 3 INVENTORY OF GR712RC MEMORY MACROCELLS

A graphical overview of memory macrocells in the GR712RC is given in Figure 1. The dashed rectangle indicates memories with incomplete address coverage in production test program revision 3. The red dots indicate memories with incomplete *bit-state coverage* (see section 5.2 for definitions). Other memories, such as the FPU registers, the 16-entry MMU TLB and FIFOs are not shown since they are implemented as hardened flip-flops [RD1], not memory macrocells. In the remainder of this Technical Note, the term “memories” will mean “memory macrocells”.

A size comparison of the memories specific to one CPU is given in Figure 2 (CPU0 and CPU1 are identical in this regard).

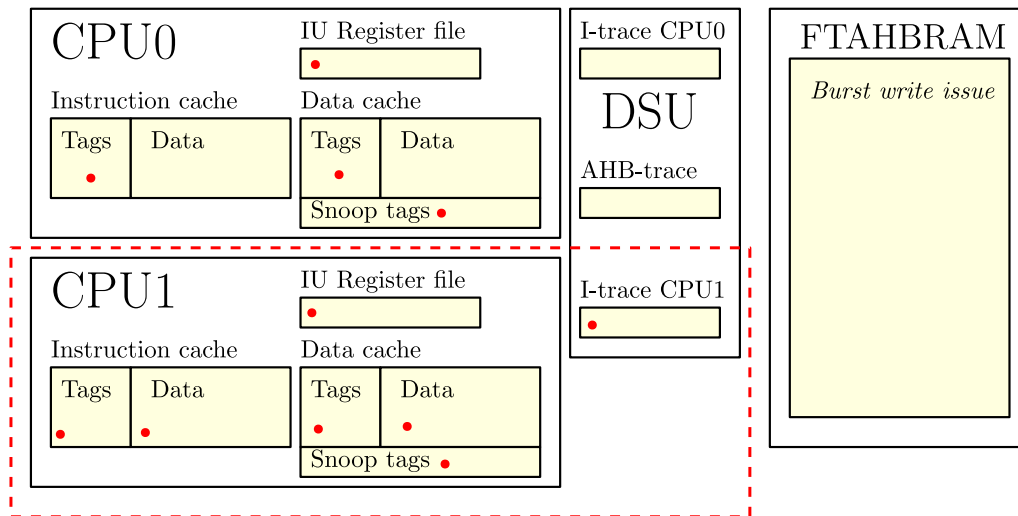


Figure 1 Overview of memory macrocells in the GR712RC. Red dots: Not all bit-states tested. Dashed rectangle: Address decoding not fully tested. FTAHBRAM: Has burst write issue.

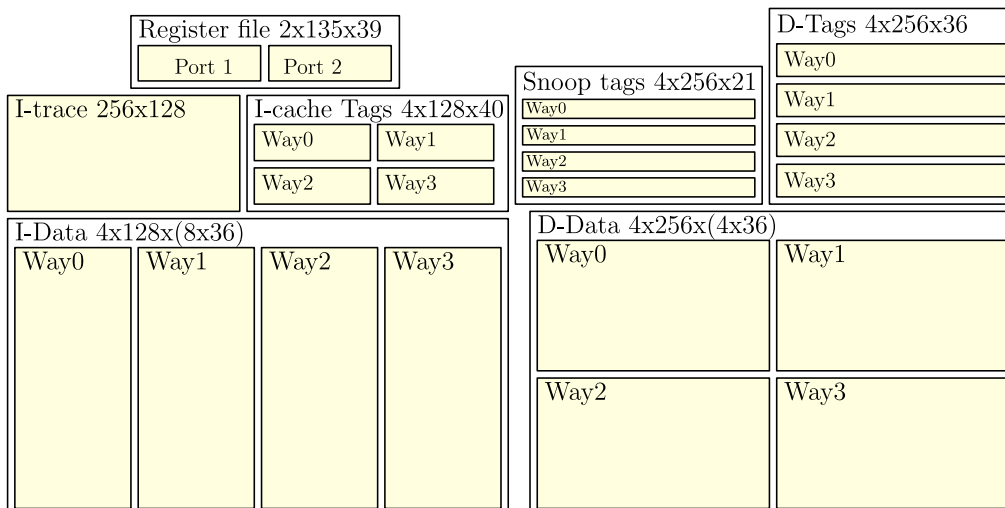


Figure 2 Comparison of the relative sizes of memories specific to one CPU (either CPU0 or CPU1). The area of each shaded rectangle is proportional to the number of bits it contains.

The organization and error detection mechanisms of the memories is summarised in the text below. The percentages do not include the instruction trace buffer since this buffer should not be used by application software. Additional details about tag fields can be found in the GR712RC user’s manual [RD2] sections 4.3.2, 4.4.3, 4.6.5, and 4.8.4.

1. IU register file (2x135x39 bits, 2.7% of CPU memory bits)
  - a. Contains the %g0-7, %i0-7, %l0-7 and %o0-7 registers.
  - b. Each register is 32 (data) + 7 (ECC) = 39 bits wide.
  - c. 1-bit error correction, 2-bit error detection (BCH code)
  - d. There are 8 global registers + 8 windows of 16 registers = 136 logical registers
  - e. The global register %g0 is 0 and not stored in memory => 135 registers in memory
  - f. The IU register file has two read ports and this is implemented by storing all registers in two identical copies in two memories. => 2x135x39 bits total size
2. I-cache tags (4x128x40 bits, 5.3% of CPU memory bits)
  - a. 4 cache ways
  - b. Each way has 128 cache lines
  - c. Each cache line tag contains the virtual address (20 bits), MMU context (8 bits), valid bits (8 bits), and parity bits (4 bits) for a total of 40 bits.
  - d. 1-bit error detection (parity)
3. I-cache data (4x128x8x36 bits, 38.4% of CPU memory bits)
  - a. There are 4 cache ways
  - b. Each way has 128 cache lines
  - c. Each line contains 8 words
  - d. Each word has 32 (data) + 4 (parity) bits
  - e. 1-bit error detection (parity)
4. D-cache tags (4x256x36 bits, 9.6% of CPU memory bits)
  - a. Differs from I-cache tags only in that there are 4 valid-bits instead of 8 and twice as many lines (256).
5. D-cache data (4x256x4x36 bits, 38.4% of CPU memory bits)
  - a. Differs from I-cache data only in that there are twice as many lines (256) with each line being half the size (4 words).
6. Snoop tags (4x256x21 bits, 5.6% of CPU memory bits)
  - a. Each snoop tag has 20 address bits (the physical address of a D-cache line) and 1 parity bit.
  - b. 1-bit error detection (parity)
7. Instruction trace-buffer (256x128 bits). This memory is only used for debug purposes, not in applications.
8. AHB trace buffer (256x128 bits). There is a single copy of this memory shared by all AHB masters and slaves. This memory is only used for debug purposes, not in applications.
9. FTAHBRAM (48x1024x40 bits). There is a single copy of this memory. It is a general purpose storage area for CPUs and DMA peripherals.

The precise coverage of revision 3 of the production test program of these memories is explained in section 5. Consequences for software executing on a GR712RC part with at least one defect in a CPU memory are given in section 6.

In short, integrity of the IU register file (1) is critical in all operation modes except power-down. Integrity of cache tags and data (2-5) are critical in any application where caches are enabled. Integrity of snoop tags (6) is critical to maintain cache coherency in SMP applications as well as single-core applications that make use of DMA. The integrity of trace buffers (7) and (8) are inconsequential to application software. Finally, from a software perspective, errors in (9) are equivalent to errors in external memory, and application note [RD3] applies.



## 4 FTAHBRAM BURST-WRITE ERRORS

The FTAHBRAM is fully tested in production test program revision 3 using single-word accesses. However, it has been found that data errors can be induced when the memory is written using bursts:

- Single-bit errors can be induced in the first word of the burst.
- All errors that have been observed would have been corrected transparently on readout by the built-in EDAC of the FTAHBRAM.
- Errors have been observed only in limited address ranges.
- A large part to part variability has been observed.
- For a given part, the number of memory locations where errors may be induced increases with decreasing supply voltage.
- In some parts errors can be induced at nominal (1.8 V) supply voltage.
- Neither single-word writes, nor burst reads induce data errors.

Burst writes are generated in two circumstances in the GR712RC:

1. When a CPU executes doubleword store instructions “std” and “stda”.
2. By cores implementing DMA. For example, the GRSPW2 (SpaceWire Interface with RMAP Support), GRETH (Ethernet Media Access Controller (MAC)), and B1553BRM (MIL-STD-1553B BC/RT/BM) cores.

Refer to the errata 1.7.21 of the GR712RC user’s manual [RD2] for workarounds.

## 5 COVERAGE OF PRODUCTION TEST PROGRAM REVISION 3

A simplified overview of the GR712RC production test program is shown in Figure 3. Each rectangle indicates a subset of tests and is grouped according to whether it tests CPU0, CPU1 and/or the FTAHBRAM.

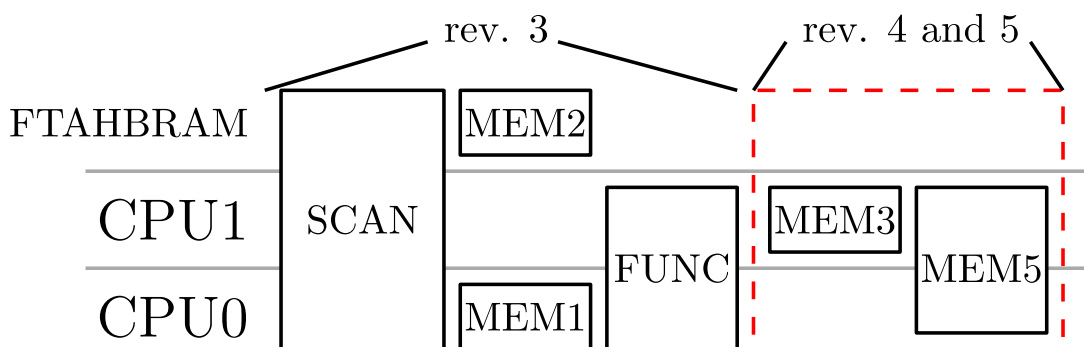


Figure 3 Simplified overview of subtests in production test program revision 3-5.

A short description of each test case from Figure 3 follows below:

1. SCAN: The GR712RC is placed in a proprietary scan-mode that verifies functionality of the internal flip-flops. Does not test memories (i.e. memory macrocells).
2. MEM1: At-speed (100 MHz) software-based test of CPU0 memories and AHB trace buffer. Covers all word addresses and bits, but there are bits in the IU register file, the I- and D-cache tag memories and the D-cache snoop tag memory that are not tested in both logical states. See section 5.2 for details.
3. MEM2: At-speed (100 MHz) software-based test of FTAHBRAM. Fully tests all words and bit-states, but only using single word writes and reads (no bursts).
4. FUNC: At-speed (100 MHz) software-based functional tests. Implicitly tests a significant fraction of the IU register file and instruction caches of both CPUs. See section 5.2 for details.
5. MEM3: A variant of the MEM1 subtest that is executed on CPU1 instead of CPU0. The MEM3 subtest has the same coverage problems as the MEM1 subtest. This subtest was added in revision 4 of the production test program.
6. MEM5: Tests of IU register file and cache tag memories that cover the gaps in the MEM1 and the MEM3 subtests. The MEM5 subtest was added in revision 5 of the production test program.

All tests are repeated at the corners of the recommended operating supply voltage and temperature specified in the GR712RC datasheet [RD4].

## 5.1 Statistics on number of parts with defects

After the introduction of the MEM3 subtest, all parts have passed the SCAN, MEM1, MEM2, and FUNC subtests. Out of all parts that have passed, only 1.2% have failed the MEM3 subtest. The resulting inferred rate of defects in CPU1 memories in parts screened with revision 3 of the production test program is thus 1.2%. All parts that passed the MEM1 and MEM3 subtests also passed the MEM5 subtest.

The two CPUs in the GR712RC are essentially identical. Hence the fraction of parts that fail only in the MEM1 subtest (and pass all other subtests) is a good proxy indicator for the fraction of parts that would have failed only in the MEM3 subtest. Inspection of records from thousands of parts tested with revision 3 of the production test program showed that about 1% of the parts failed only in the MEM1 subtest. This is consistent with the observed 1.2% unique MEM3 fails above.

All parts that have failed only in the MEM1 or MEM3 subtests have done so at all tested supply voltage and temperature corners. There is no observed voltage or temperature dependence.

The production test records do not contain enough information to distinguish between different types of defects for a given failing part. For that reason, no attempt has been made to quantify the rate of address decoding errors relative to defects localized to single bits (e.g. stuck bits).

## 5.2 Memory test coverage of production test program revision 3

As indicated by Figure 3, the main coverage issue in production test program revision 3 is the lack of dedicated tests for CPU1 memories. The only subtest with partial coverage of CPU1 memories is FUNC. A second issue is the coverage gap between the MEM1 and MEM5 subtests for CPU0 memories. This section quantifies the incomplete coverage of the FUNC subtest for CPU1 memories and the MEM1 subtest for CPU0 memories.

To obtain quantitative measures of coverage, two classes of memory failure modes need to be considered.

Firstly address decoding errors. A method to test for such errors is to first write unique data to each memory word and then read back the entire memory. If some memory words are not read back, then the test is incomplete and a reasonable address coverage measure is the number of words read divided by the total number of words.

Secondly, errors localized to specific bits. A method to test for such errors is to perform a set of write and read sequences such that, at the end, each bit has been read as both 0 and as 1 at some point during the test. If such a test is interrupted before completion, we can use the number of “bit-states” that have been read as a measure of the test’s coverage. Since each memory bit has two possible states (0 and 1), a memory consisting of  $N$  bits can be said to have  $2N$  bit-states. This measure is appropriate to quantify stuck-bit coverage when there is an equal prior probability of each bit being stuck-at-0 or stuck-at-1.

The coverage measures defined above were determined by running the MEM1 and FUNC subtests in an RTL simulation of the GR712RC. The simulation logged all individual reads and writes to memory primitives. The simulation model also allowed stuck-at errors to be injected in any bit so that it could be confirmed, in a black-box manner, if the production test program would have detected that error.

Snoop tag coverage was analysed for CPU0/MEM1, but not CPU1/FUNC. In the latter case a lower bound of zero coverage has been assumed. This is justified because only a small fraction of snoop tag defects can potentially be discovered by the FUNC subtest. Firstly because CPUs do not snoop on themselves. Secondly because during execution of the FUNC subtest only a small amount of memory is cached in both the CPU0 and CPU1 D-caches (5 cache lines).

The address coverage estimate is given in Table 1 and the bit-state coverage estimate in Table 2. Note that the estimated bit-state coverage is higher than address coverage for cache tag memories. This happens because words containing all 0s have been excluded from the analysis behind Table 1, but not from Table 2. The coverage by the FUNC subtest is incomplete for all CPU1 memories, both in terms of addresses and bit-states. D-cache coverage is negligible, while the IU register file and I-cache have only partial coverage. Therefore, residual errors in CPU1 memories after the FUNC subtest screening should be somewhat more common in the D-cache than in other memories. For CPU1 memories, nothing can be inferred about the rate of address decoding errors in comparison with bit errors.

The MEM1 subtest has 100% address coverage of all CPU0 memories so any residual defects after MEM1 screening can be assumed to be localized to single bits. The bit-state coverage of the MEM1 subtest is incomplete in the IU register file and tag memories with 4% of bit-states not tested (because 8% of all bits are only tested in a single logical state). However, note that these numbers neglect the FUNC coverage of CPU0 memories.

*Table 1 Estimate of address coverage of CPU0 memories by the MEM1 subtest, and CPU1 memories by the FUNC subtest.*

	CPU0 (MEM1)		CPU1 (FUNC)	
	Words	Fraction	Words	Fraction
IU register file	270	100%	160	59%
I-cache tags	512	100%	208	41%
I-cache data	4096	100%	1242	30%
D-cache tags	1024	100%	71	6.9%
D-cache data	4096	100%	74	1.8%
Snoop tags	1024	100%	0	0.0%
Totals:	11022	100%	1755	16%

*Table 2 Bit-state coverage of CPU0 memories by the MEM1 subtest, and CPU1 memories by the FUNC subtest. Note that the total number of bit-states is twice the total number of memory bits.*

	CPU0 (MEM1)		CPU1 (FUNC)	
	Bit-states	Fraction	Bit-states	Fraction
IU register file	18444	88%	8937	42%
I-cache tags	33100	81%	21856	53%
I-cache data	294912	100%	44870	15%
D-cache tags	54417	74%	21531	29%
D-cache data	294912	100%	3481	1.2%
D-cache snoop tags	37420	87%	0	0%
Instruction trace buffer	65536	100%	0	0%
AHB trace buffer	65536	100%	N/A	N/A
Totals	864277	96%	100675	12%

### 5.3 Extrapolated probabilities of defects evading screening

The analysis in section 5.2 shows that there is a non-zero probability for defects to evade screening with production test program revision 3. Since no parts tested so far (see section 5.1) have failed in the MEM5 subtest, the probability of defects in CPU0 of parts screened with revision 3 can only be extrapolated.

Since the MEM1 subtest completely screens away address decoding errors, a probability can be extrapolated based on an assumed overall stuck-at defect rate and the bit-state coverage from Table 2. An observational upper bound for the rate of at least one stuck-at error in CPU0 memories prior to MEM1-screening is 1% (see section 5.1). This is an upper bound because the observed rate includes address decoding errors. The resulting extrapolated probabilities are given in Table 3. Numbers for CPU1 memories are included for an order of magnitude comparison. But note that the assumptions behind the calculations do not hold for CPU1 memories since the FUNC subtest does not screen out all address decoding errors.

Entries in boldface indicate possibly “fatal errors” (defined as being able to cause a software crash or data corruption). It is assumed that residual defects in CPU0 memories after MEM1 screening are single-bit defects with no correlation for occurrence of multiple defects within the same data word. Under this assumption, only defects in the IU register file would cause fatal errors.

In contrast, residual errors in CPU1 memories after the FUNC subtest screening may cause fatal errors in any of the memories. This is because address decoding errors are fatal in all memories (apart from the Instruction and AHB trace buffers, which should not be used by applications). Again, refer to section 6.

Table 3 Extrapolated probability of defects to be present in parts screened only with MEMI (production test program revision 3).

Memory	CPU0	CPU1
IU register file	<b>0.004 %</b>	<b>0.02 %</b>
I-cache tags	0.011 %	<b>0.03 %</b>
I-cache data	0.000 %	<b>0.34 %</b>
D-cache tags	0.027 %	<b>0.07 %</b>
D-cache data	0.000 %	<b>0.40 %</b>
D-cache snoop tags	0.008 %	<b>0.06 %</b>
Instruction trace buffer	0.000 %	0.09%
AHB trace buffer	0.000 %	N/A

Note that if a defect is present the IU register file of a particular part, then the defect is expected to be discovered immediately as soon as non-trivial software is executed on the part (e.g. during board-level unit tests).

Finally, note that 93% of the possible single-bit defects in CPU0 memories that could remain after screening with production test program revision 3 are in the caches where the LEON3FT SEU-mitigation would handle them with no functional software impact. See section 6 for details.

## 6 IMPACT OF A DEFECT IN A CPU MEMORY ON SOFTWARE

Terms like “single-bit” error are used in this section since they are convenient from the point of view of the error correction and detection features in the GR712RC<sup>1</sup>. But the term is inaccurate for errors caused by permanent defects. In this context we say that an “*n*-bit error” occurs when the data read out from a particular memory differs by *n* bits compared to what would have been read out if the same software had been run on a part without defects.

By the term “stuck-at defect” we refer to a defect that causes a bit to remain at 0 or 1 despite having been written with the opposite value. For such stuck-at defects, the relation between defects and “*n*-bit errors” is direct. But memories can have other types of defects. One class is addressing errors, where writes to one address can affect what data is read out from a *different* address at a later time. In that case, a single defect may cause any number of bit errors in a data word.

By design, the GR712RC can recover from any *transient* single-bit error, and this process is transparent to software. But a stuck-at error is not transient and would be redetected every time the bit is reread. For this reason, the GR712RC cannot recover from all single-bit stuck-at errors. Furthermore, the GR712RC in general cannot recover from multi-bit errors.

<sup>1</sup> Suggested reading: Section 4.8 “Error detection and correction” in the GR712RC user’s manual [RD2]

An overview of possible consequences of different numbers of bit errors in different types of memories is given below. Fatal errors (errors that can crash or corrupt the application) have been marked with boldface:

- I. IU Register file:
  1. Transient single-bit error: IU register file contents corrected, instruction restarted after 6 cycles, error counter incremented, and CPU continues with normal operation.
  2. **Stuck-at single-bit error**: Detected by ECC, but CPU enters an infinite loop due to restarting the instruction that caused the error to be detected thereby rereading the still corrupted register.
  3. **Two-bit error**: Detected by ECC and triggers trap 0x20 (register\_access\_error).
  4. **Three or more bit errors**:
    - a. **Trap 0x20** (probability<sup>2</sup> 40 – 70%)
    - b. **Data incorrectly corrected**. Leads to data corruption or infinite loop (see above). (probability 30 – 60%)
    - c. **Data incorrectly considered correct**. Execution continues uninterrupted, but with erroneous data. Unpredictable results. (probability < 1%)
- II. I-cache and D-cache (data and tags)
  1. Parity error (all single-bit errors and >60% of multi-bit errors): Detected by parity check, same behavior as a cache miss. Leads to performance degradation due to reloads from main memory. Error counters saturate.
  2. **No parity error** (<40% of multi-bit errors): Various kinds of data corruption.
    - a. I-cache data: Wrong instruction executed or trap 0x02 (illegal\_instruction)
    - b. D-cache data: Wrong data used. Unpredictable results.
    - c. I-cache or D-cache tag
      1. Corruption of “valid”-bits in cache tag:
        - a. false valid: wrong or invalid instruction or data
        - b. false invalid: reload from external memory, continue with normal operation
      2. Corruption of address-bits in cache tag:
        - a. false hit: wrong instruction or data
        - b. false miss: reload from external memory, continue with normal operation
      3. Corruption of MMU context-bits in cache tag (MMU enabled):
        - a. false context hit: wrong instruction or data
        - b. false context miss: reload from external memory, continue with normal operation
- III. D-cache snoop tags:
  1. Single-bit error: Detected by parity bit. Cache line invalidated more often than usual, normal operation continues. Not tracked by any counter.
  2. Odd number of bit errors: Same as 1.
  3. Non-zero even number of bit errors:
    - a. **false miss**: Failure to invalidate cache entry. Cache coherency lost (typically leads to process synchronization error).
    - b. false hit: Additional invalidation of cache entry, continue with normal operation.
- IV. FTAHBRAM: From an error management point of view, this is equivalent to an external memory. See [RD3] for details.

<sup>2</sup> The exact probability depends on which model is used for defect rate per data word. However, the given probability range holds for a broad class of models.



If a GR712RC part contains a defect capable of triggering one of the fatal errors bolded in the list above, then this would in most cases be detected almost immediately by running non-trivial software on the part. The IU register file and caches are small compared to typical application software. One second of execution of a memory intensive (relative to the  $2 \times 16$  KiB/CPU cache size) application is enough to replace the data in the IU register file and caches multiple times. Hence most fatal defects should be detected within seconds by running software.

As shown in Table 2, the distribution of insufficiently tested bits is not uniform. The most severe IU register file and instruction cache errors are screened away by the FUNC subtest. This has the result that small software applications (relative to the cache size of  $2 \times 16$  KiB) has a smaller chance of encountering untested bit-states than large and/or complex software applications. But when a small software application is recompiled, the register and cache access pattern may change slightly and result in untested bit-states being accessed. SMP operating systems such as RTEMS, VxWorks, and Linux have a particularly large chance of using untested bit-states. These are also sensitive to snoop tag errors.

## 6.1 Correctable error counters

Non-fatal errors due to defects are subtle since they are transparent to software and have characteristics akin to radiation-induced single-event upsets, except that they occur deterministically. Software that regularly reads out the cache parity error counters would quickly find that something is not normal since the applicable counter would saturate quickly even in the absence of radiation. Monitoring these counters is strongly recommended for any software intended for applications that will operate in a radiation environment.

Each CPU has a set of counters that keeps track of the number of detected errors of each type<sup>3</sup> that have occurred. Cache parity error counters can be read via the cache control register, and the IU register file error counter can be read via the ASR16 register (see sections 4.5.4, 4.5.6 and 4.8.2 in [RD2]).

A C-program can read out the cache control register and ASR16 with the following inline assembly code snippets:

```
/* Read cache control register*/
uint32_t ccr;
asm volatile (
    "lra [%1] 0x02, %0"
    : "=r"(ccr)
    : "r"(0x00)
);

/* Read ASR16 register */
uint32_t asr16;
asm volatile (
    "mov %%asr16, %0"
    : "=r"(asr16)
    :
);
```

<sup>3</sup> Except for snoop tag parity errors which are not tracked. A snoop tag parity error is treated the same way as if it was a snoop hit, invalidating the cache line.

The registers can also be conveniently read out in GRMON with the commands “info reg -v cpuX::ccr” and “reg asr16 cpuX”. An example readout of these registers for CPU1 is given below. In this case all five counters were zero.

```
grmon3> info reg -v cpu1::ccr
      LEON3FT SPARC V8 Processor
      Cache control register                                0x008b800f
29    rft          0x0      Register file test select
28    ps           0x0      Parity Select
27:24 tb          0x0      Test Bits
23    ds           0x1      Data cache snoop enable
22    fd           0x0      Flush data cache
21    fi           0x0      Flush Instruction cache
20:19 ft          0x1      FT scheme
17    st           0x1      Separate snoop tags
16    ib           0x1      Instruction burst fetch
15    ip           0x1      Instruction cache flush pending
14    dp           0x0      Data cache flush pending
13:12 ite         0x0      Instruction Tag Errors
11:10 ide         0x0      Instruction Data Errors
9:8   dte         0x0      Data Tag Errors
7:6   dde         0x0      Data Data Errors
5     df           0x0      Data Cache Freeze on Interrupt
4     if           0x0      Inst. Cache Freeze on Interrupt
3:2   dcs         0x3      Data Cache state
1:0   ics         0x3      Instruction Cache state

grmon3> reg asr16 cpu1
asr16 = 49152 (0x0000c000)
```

There is no dedicated parity error counter for the snoop tags, so defects located in the snoop tags would be more difficult for software to detect. However, GRMON provides a set of “dcache”-commands that may be useful. For example, errors in the snoop tags can lead to D-cache inconsistency and GRMON provides the command “dcache diag cpuX” which compares all D-cache contents with external memory and finds any inconsistency.

## 6.2 Radiation effects

Non-fatal defects allow software to operate normally with a performance reduction in the absence of single-event upsets (SEUs). However, an SEU that flips a bit in a cache word or tag that already contains a single-bit stuck-at defect is functionally equivalent to a multi-bit upset in that word and may lead to a crash or corruption of the application

Suppose that there is a permanent single-bit stuck-at defect in one of the cache memories and that the overall per bit SEU rate of the cache memories is  $r$ . Generally, each bit is part of a group of 9 bits over which parity is computed and an undetectable error only happens if one of the other 8 bits is flipped by an SEU. Hence the rate of undetectable errors is  $8 \times r$  for the cache word containing the stuck bit. However, there are exceptions:

- In the snoop tags, one parity bit is used for 20 data bits  $\Rightarrow 20 \times r$
- Instruction tags are 40 bits long, but still only use four parity bits. The fourth parity bit covers both the 8-bit MMU context and 8 address bits  $\Rightarrow 16 \times r$
- The first two parity bits in the D-cache tag field only cover 4 data bits each.  $\Rightarrow 4 \times r$

A representative rate for the GR712RC caches in a GEO environment is  $r = 2 \cdot 10^{-7}$  seu/bit/day. The undetected upset rate with a single stuck-at bit somewhere in the caches is therefore at most  $20 \times r = 4 \cdot 10^{-6}$  events/day. A mean time to upset of above 680 years.



## 7 SOFTWARE PACKAGE FOR BOARD-LEVEL MEMORY TESTS

Upon request to [support@gaisler.com](mailto:support@gaisler.com), GR712RC customers that have parts screened with revision 3 of the production test program already integrated into boards will be provided with a software package “gr712rc-tn0002-sw”. The software package includes a prebuilt binary, C and assembler source code, and a TCL script that can be used with GRMON to run the tests. Detailed instructions can be found in the README included in the software package. The rest of this section provides an overview of the contained test software.

The software is intended to be loaded, started and monitored by GRMON2 or GRMON3 connected via a JTAG or SpaceWire debug link. The software executes out of the FTAHBRAM (On-chip Memory with EDAC Protection) so there is no dependence on external memory.

The software and GRMON will only use the FTAHBRAM, CPU0, CPU1, DSU (Hardware Debug Support Unit), IRQMP (Multiprocessor Interrupt Controller) and GPTIMER/GRTIMER (General Purpose Timer Unit) cores. No accesses to the FTMCTRL (Fault Tolerant Memory Controller) memory regions (PROM, IO, SRAM and SDRAM) or IO peripherals are made.

The software tests the full IU register file, I-cache (tags and data), and D-cache (tags, data, and snoop tags) of both CPUs. Parity and ECC bits are also covered by the test. Optionally, the software can also be configured to test the CPU1 instruction trace buffer but note that this memory should not be used by application software. The software does not test for occurrence of the FTAHBRAM burst write errors described in section 4.

A review of historical production test data of GR712RC parts shows that if defects in CPU memories are detected at one supply voltage and temperature condition, then defects will be detected in the entire operating range of the part (see section 5.1). Therefore, it is sufficient to run the software at room temperature and nominal supply voltage to determine if defects are present or not.

It is possible to tailor the software such that it can be loaded and executed on boards where no GRMON debug link is available. However, the software is not suitable for permanent integration into application software.

## 7.1 Memory test methodology

The baseline algorithm used in the memory tests has two parts. First an address correctness step where unique values are written into each word of the memory block. Next a MARCH-C pattern to find defective bits. Here, it is verified that each bit can be written with both 0 and 1. The exact details vary in each type of memory, depending on if the memory a single- or dual-port type, and on the various kinds of automatic ECC/parity computation, as well as available diagnostic memory access interfaces.

A pseudo-code description of the test steps follows below:

```
## Baseline address correctness algorithm:
NOTE: The total size of the memory in number of words is denoted N
-----
1. Initial write
for i=0 to N-1
    write i to address i

2. Readback, second fill and final readback
for i=0 to N-1
    j = N-1 - i
    read from address i and compare value against i
    write j to address i
    read from address i and compare value against j

## Baseline MARCH-C pattern
NOTE: The word width is between 21 and 40 bits depending on memory type.
NOTE: In some test routines, the readback is divided into three separate loops
where ECC/parity bits, odd word addresses, and even word addresses are read
separately.
-----
1. Initial write
for i=0 to N/2-1
    write 0x55...55 to address 2*i+0
    write 0xAA...AA to address 2*i+1

2. Readback and write bitwise inverse
for i=N/2-1 downto 0
    read address 2*i+1 and compare against 0xAA...AA
    write 0x55...55 to address 2*i+1
    read address 2*i+0 and compare against 0x55...55
    write 0xAA...AA to address 2*i+0

3. Readback of inverted pattern
for i=0 to N/2-1
    read address 2*i+0 and compare against 0xAA...AA
    read address 2*i+1 and compare against 0x55...55
-----
```



## 7.2 Example output

Below is example output of the software when executed on a GR712RC part with no errors in either CPU0 or CPU1 memories.

```
$ grmon -ftdi -nosram -nosdram -c systest.tc1

GRMON debug monitor v3.2.14 64-bit pro version

a0000000          192.0kB / 192.0kB  [=====>] 100%
Finished washing!
  A0010000 .text          28.8kB / 28.8kB  [=====>] 100%
  A0017320 .rodata         16B          [=====>] 100%
  A0017330 .data          200B          [=====>] 100%
Total size: 28.99kB (776.16kbit/s)
Entry point 0xa0010000
Image ../systest-cpu0 loaded
CPU 0: Program exited normally
CPU 1: Power down mode
0xa0017430 00000001 00000001 00000000 00000000 .....
0xa0017440 4f4b2120 4f4b2120 4f4b2120 ffffffff OK! OK! OK! ....
0xa0017450 ffffffff ffffffff ffffffff ffffffff .....
0xa0017460 00000000 00000007 ffffffff ffffffff .....
a0000000          192.0kB / 192.0kB  [=====>] 100%
Finished washing!
  A0010000 .text          28.8kB / 28.8kB  [=====>] 100%
  A0017320 .rodata         16B          [=====>] 100%
  A0017330 .data          200B          [=====>] 100%
Total size: 28.99kB (778.70kbit/s)
Entry point 0xa0010000
Image ../systest-cpu1 loaded
CPU 0: Program exited normally
0xa0017430 00000001 00000001 00000000 00000000 .....
0xa0017440 4f4b2120 4f4b2120 4f4b2120 ffffffff OK! OK! OK! ....
0xa0017450 ffffffff ffffffff ffffffff ffffffff .....
0xa0017460 00000000 00000007 ffffffff ffffffff .....

#####
Result:
Test CPU0 IU-Registers    OK!
Test CPU0 I-Cache        OK!
Test CPU0 D-Cache        OK!
Test CPU1 IU-Registers    OK!
Test CPU1 I-Cache        OK!
Test CPU1 D-Cache        OK!

CPU0 OK!
CPU1 OK!

grmon3>
```

Copyright © 2022 Cobham Gaisler.

Information furnished by Cobham Gaisler is believed to be accurate and reliable. However, no responsibility is assumed by Cobham Gaisler for its use, or for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cobham Gaisler.

All information is provided as is. There is no warranty that it is correct or suitable for any purpose, neither implicit nor explicit.